
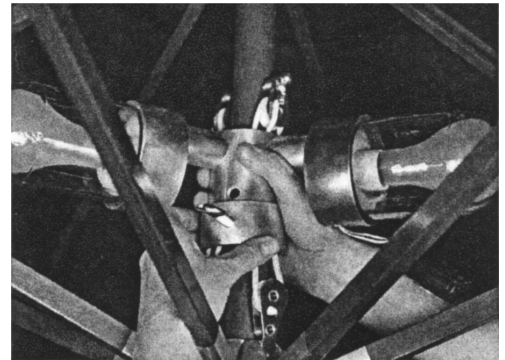


INSTALLING YOUR LAMP

LAMP INSTRUCTIONS

- You must have a 300-watt low-voltage transformer to power your lamp.
- Open the umbrella and place the height position pin into the bottom hole in the umbrella pole.
- Take the "C" cuff off the lighting fixture (top photo) and place the lamp inside the umbrella, below the upper hub pulleys and eye screw tie-offs. Close the lamp around the pole and the pulley cords.
- Slide the "C" cuff back into its locking position (bottom photo). When locking the lamp in place, pull the cords toward the thumb screw to allow them to move for umbrella adjustment.
- Using the low-voltage cable provided, plug the male portion of the cord in the female socket on the lamp. The low-voltage cable can be brought down the pole or out through the top of the umbrella.
- Move the height adjustment pin into the second or third hole on the pole.

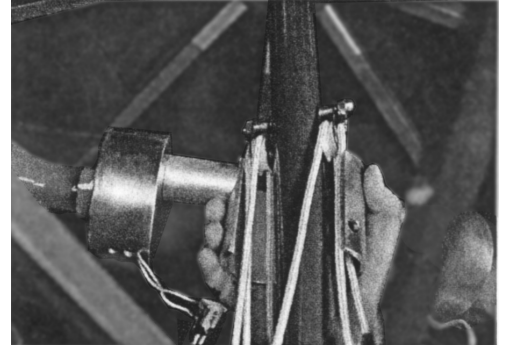

THE DIFFUSING PANEL

- Take the center of the white diffusing panel and fasten it around the lower hub where the spokes meet. (Make sure the painted side of the panel is facing the ground.)
- Twist the wire in the neck of the panel tightly around the hub. Push the excess wire up and bend it over one of the spokes to help hold the panel in place. Place the pull-cord with the adjustment pin through the opening between the wire and the Velcro in the panel, allowing the cord to move freely.
- Lift the corners of the diffusing panel to line up with the brass hooks in the umbrella and fasten in place.
- If your low-voltage cable feeds downward along the pole, attach the black plastic ties (provided) around the pole to secure the cable. Use one under the upper hub and one around the base. (To help mask the cable, wrap the pull-cord around the umbrella pole several times.)

WARNINGS

- This lamp requires a 300-watt low-voltage transformer. Do not attempt to use a standard 110-volt power source.
- Use only 12 volt bulbs.
- Illuminated surfaces will get hot: Never allow the lamp to touch the fabric, or any combustible material.
- Never close umbrella while lamp is still hot.
- Never operate the lamp during the day or with the umbrella closed.
- Never install or remove the lamp while the power is on.
- Lamp must be removed before closing umbrella.